


POWERFUL BATTERIES

TUBULAR BATTERIES | SOLAR BATTERIES | INVERTER BATTERY

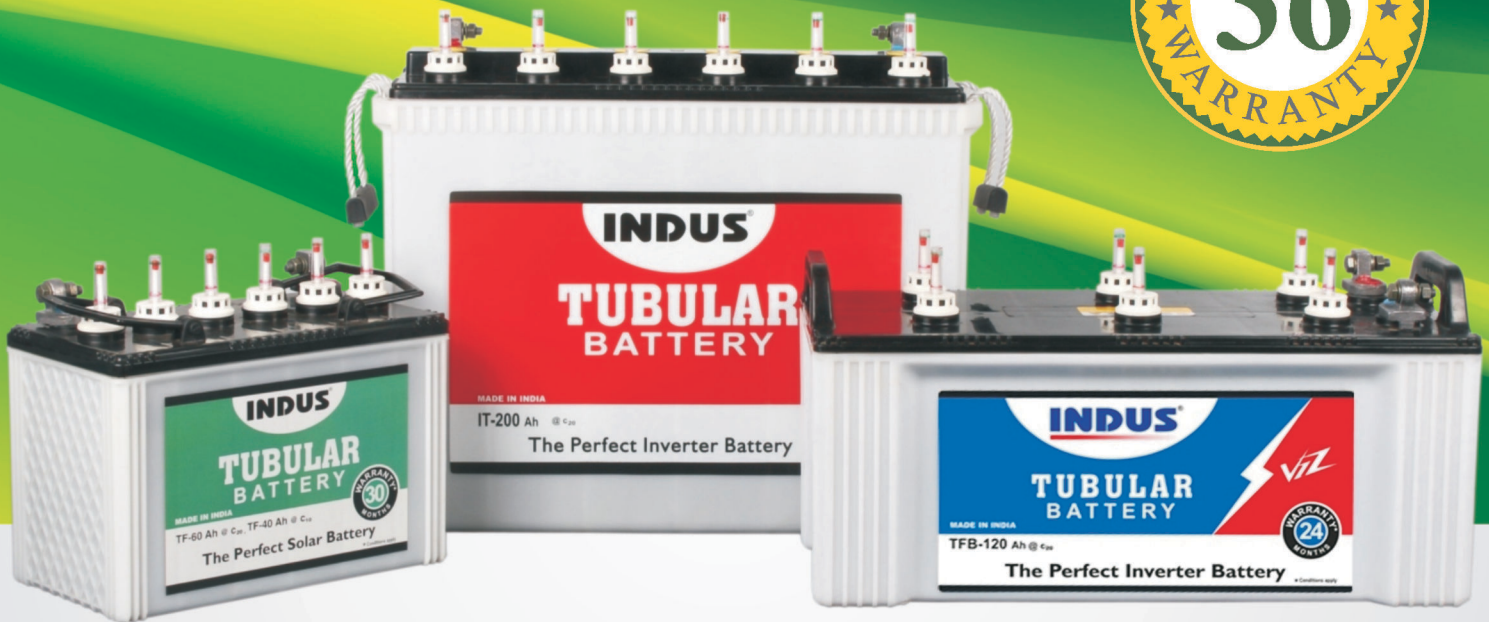

GET THE OPTIMUM FUNCTIONALITY FROM YOUR UPS/ INVERTER

Indus Tubular Battery Features:

- Easy Maintenance
- Latest Technology Tubular Battery for longer life
- Built-in flame arrestor
- Tunes 1200 cycles
- Special alloys to withstand high temperatures
- Superior Drain back design
- Greater clearance

ABOUT INDUS BATTERIES

Our wide range of Tubular batteries are developed using the best in class technology and set the industry standards high. These batteries are vastly paired with inverters and are highly recommended for optimum functionality & output.

The batteries have a built-in fume arrester & is much appreciated for its easy to maintain structure, greater clearance & rugged construction.]

In addition to the above, the combination of low antimony & ceramic assists to the keep the water level requirement in control.

TECHNICAL SPECIFICATIONS

Viz Tubular Battery

Sr No	Battery Type	Voltage	Capacity	Overall Diamantation				without Acid Weight (Kg)±5%	with Acid Weight (Kg)±5%	Electrolyte Volume (LTR)±5%
			C20 (Ah)	Lenth ± 5	Width± 5	Height ± 5	Ht (with indicator) ± 5			
1	Viz-TFB 120 Ah	12 V	120Ah	508 mm	200 mm	297mm	310 mm	26.2	42.6	15.4
2	Viz-TFC 150 Ah	12 V	150Ah	515 mm	275 mm	285 mm	305 mm	31.5	52.6	18.5
3	Viz-TFD 180 Ah	12 V	180Ah	515 mm	275 mm	285 mm	305 mm	36.5	55.4	19.9

Flat Tubular Battery

Sr No	Battery Type	Voltage	Capacity	Overall Diamantation				without Acid Weight (Kg)±5%	with Acid Weight (Kg)±5%	Electrolyte Volume (LTR)±5%
			C20 (Ah)	Lenth ± 5	Width± 5	Height ± 5	Ht (with indicator) ± 5			
1	TF-B-120 Ah	12 V	120Ah	508 mm	200 mm	297mm	310 mm	29.2	47	15.4
2	TF-C-150 Ah	12 V	150Ah	515 mm	275 mm	285 mm	305 mm	35	59.4	18.5
3	TF-D-180 Ah	12 V	180Ah	515 mm	275 mm	285 mm	305 mm	40.2	62	19.9
4	TF-F-200 Ah	12 V	200Ah	515 mm	275 mm	285 mm	305 mm	47.5	68	17.5

Tall Tubular Battery

Sr No	Battery Type	Voltage	Capacity	Overall Diamantation				without Acid Weight (Kg)±5%	with Acid Weight (Kg)±5%	Electrolyte Volume (LTR)±5%
			C20 (Ah)	Lenth ± 5	Width± 5	Height ± 5	Ht (with indicator) ± 5			
1	IT-C-150 Ah	12 V	150Ah	500 mm	190 mm	405 mm	425 mm	37.2	62	20.4
2	IT-F-200 Ah	12 V	200Ah	500 mm	190 mm	405 mm	425 mm	43.8	67.2	19.4
3	IT-G-250 Ah	12 V	250 Ah	500 mm	190 mm	405 mm	425 mm	55	77	18.4

Solar Tubular Battery

Sr No	Battery Type	Voltage	Capacity	Overall Diamantation				without Acid Weight (Kg)±5%	with Acid Weight (Kg)±5%	Electrolyte Volume (LTR)±5%
			C10 (Ah)	Lenth ± 5	Width± 5	Height ± 5	Ht (with indicator) ± 5			
1	TF-40 Ah	12 V	40 Ah	410 mm	173 mm	255 mm	270 mm	15.8	23.6	7.1
2	TF-75 Ah	12 V	75 Ah	505 mm	220 mm	252 mm	265 mm	19.4	37.4	15.2
3	TF-100 Ah	12 V	100 Ah	508 mm	200 mm	297 mm	310 mm	29.2	47	15.4
4	TF-120 Ah	12 V	120 Ah	500 mm	190 mm	405 mm	425 mm	37.2	62	19.4
5	TF-150 Ah	12 V	150 Ah	500mm	190 mm	405 mm	425 mm	43.8	67.2	20.8

Manufactured By

Indus Instruments Pvt. Ltd.

Abhang Apartment, Near Hotel Modern Café, Phadke Road, Dombivli (East), Dist. Thane, Maharashtra. India 421201
Mobile :- +91 810 838 3838, Landline :- +91 251 243 6188
Email :- info@induspowers.com

Authorised Partner